



# INTAGLIO with weighted base

FR WIDE WIDTH SHEER

DRAPERY FABRIC

COLLECTION NAME	Intaglio
DESIGN NAME	Intaglio
BRAND	Maurice Kain
NUMBER OF COLOURS	11
FABRIC TYPE	Plain
USAGE	Sheer
COMPOSITION	100% POLYESTER
WIDTH	298cm

	SELVEDGE
	Î
	SELVEDGE
UP DRAPERY	CONTINUOUS





do not bleach dryclean P50

N NAME	Intaglio	PATTERN REPEAT	Nil
ME	Intaglio	CONTINUOUS	Y
	Maurice Kain	ADDITIONAL FINISHING	Weighted Base
OF COLOURS	11	WEIGHT (GSM)	136gsm
PE	Plain	ROLL SIZE	40m
	Sheer	COLOURFASTNESS TO LIGHT	6
ION	100% POLYESTER	FLAMMABILITY	AS/NZS 1530.2 & 1530.3
	298cm	ABRASION	N/A

warm iron on

fabric side only do not tumble dry

#### CARE INSTRUCTIONS

Regular care will minimize need for additional cleaning. Gently vacuum with appropriate attachment. Always exercise cation when spot cleaning. Test clean on nonexposed surface. Remove hooks rings & trims before cleaning. Gently vacuum regularly with appropriate attachment. Warm hand wash. Do not bleach. Do not rub or wring. Drip dry in shade. For best results hang curtains by their hooks to damp dry immediately. Use warm iron. Dry cleanable P 50. Possible shrinkage 3%.

## AVAILABLE COLOURS



warm hand wash



WHITE





Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

### **TEST REPORT**

Client :	16 - 20 Appa	Basford Brands Pty Ltd 16 - 20 Apparel Close Breakwater VIC 3219		: : :	17-003133 28/06/2017 28/06/2017	
Sample D	escription	Clients Ref : "Intaglio" Decorative Polyester Sheer Fabric End Use : Drapery				

Nominal Composition : Polyester Nominal Mass per Unit Area/Density : 136g/m2

AS 1530.2-1993


#### Methods for Fire Tests on Building Materials, Components and Structures. Part 2: Test for Flammability of Materials

Date Tested		27/06/2017	
Flammability Index		5	
	Length	Width	
Spread Factor	4	2	
Heat Factor	1	1	
Maximum height (d)			
Mean	4.7	4.0	
Coefficient of Variation	11.1	0.0	%
Heat (a)			
Mean	1.5	1.5	°C.min
Coefficient of Variation	0.0	0.0	%
Number of Specimens Tested	6	6	

Observation

Visible smoke, melting driping flaming debris.

These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test, and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use.

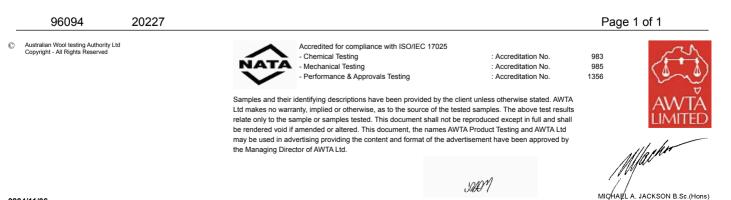

APPROVED SIGNATORY

ANAGING DIRECTOR



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

### **TEST REPORT**

1	Basford Brai 16 - 20 Appa Breakwater '	arel Close	Test Number Issue Date Print Date	r : : :	17-00313 27/06/201 27/06/201	17
Sample Des	scription	Clients Ref : "Intaglio" Decorative Polyester Sheer Fabric End Use : Drapery Nominal Composition : Polyester Nominal Mass per Unit Area/Density :	136g/m2			
AS/NZS 1530.3-1	1999	Methods for Fire Tests on Building Materia Part 3: Simultaneous Determination of Igni Flame Propagation, Heat Release and Smo	itability,	ures		
		Face tested:	Face			
		Date tested:	26/06/2017			
			Standard Error		Mean	
		Ignition time	Nil		Nil	min
		Flame propagation time	Nil		Nil	sec
		Heat release integral	Nil		Nil	kJ/m²
		Smoke release, log d	0.0505		-1.7731	
		Optical density, d			0.0174	/ metre
		Number of specimens ignited:			0	
		Number of specimens tested:			6	
		Regulatory Indices:				
		Ignitability Index			0	Range 0-20
		Spread of Flame Index			0	Range 0-10
		Heat Evolved Index Smoke Developed Index			0	Range 0-10 Range 0-10

96007 20226 Page 1 of 2 Australian Wool testing Authority Ltd Copyright - All Rights Reserved Accredited for compliance with ISO/IEC 17025 - Chemical Testing : Accreditation No. 983 Mechanical Testing : Accreditation No. 985 - Performance & Approvals Testing : Accreditation No 1356 Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

SADM

IA∉L A. JACKSON B.Sc.(Hons)

MANAGING DIRECTOR

(C)

APPROVED SIGNATORY



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

#### **TEST REPORT**

Client : Basford Brands Pty Ltd 16 - 20 Apparel Close Breakwater VIC 3219 

 Test Number
 :
 17-003132

 Issue Date
 :
 27/06/2017

 Print Date
 :
 27/06/2017

These results only apply to the specimen mounted, as described in this report. The result of this fire test may be used to directly assess fire hazard, but it should be recognised that a single test method will not provide a full assessment of fire hazard under all fire conditions.

The reaction of thin unsupported flexible materials to flame impingement can be assessed in accordance with AS 1530.2. Where materials of thickness less than 2mm that are sufficiently flexible to be bent by hand around a mandrel of 2mm diameter or less are subjected to the test described herein, they should also be subjected to the test in AS 1530.2.

Ignition is initiated by a pilot flame that is held near, but does not touch the specimen. A material that does not ignite during the standard test may ignite if contacted with a pilot flame during the test.

The specimens were mounted to simulate use in an unsupported or free hanging mode. The results may be significantly different when mounted to simulate a wall cladding or upholstery application.

To allow free movement of sample during testing all corners were folded away from the clamps.

Each test specimen was sandwiched between two layers of galvanised welded square mesh made from wire of nominal diameter 0.8mm and nominal spacing 12mm in both directions, stapled through at four points, each 100mm from the centre of the sample and the assembly clamped in four places.

96007 Australian Wool testing Authority Ltd Copyright - All Rights Reserved

20226



the Managing Director of AWTA Ltd.

Accredited for compliance with ISO/IEC 17025 - Chemical Testing - Mechanical Testing - Performance & Approvals Testing

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by

: Accreditation No. : Accreditation No. : Accreditation No.

983 985

1356

Page 2 of 2



SAD^1

APPROVED SIGNATORY

C