



filigree

COMPLETE LIVING

COMO


FR WIDE WIDTH SHEER DRAPERY FABRIC




COLLECTION NAME	Sheerly Essentials	PATTERN REPEAT	Nil
DESIGN NAME	Como	CONTINUOUS	Y
BRAND	Filigree	ADDITIONAL FINISHING	N/A
NUMBER OF COLOURS	3	WEIGHT (GSM)	48gsm
FABRIC TYPE	Plain	ROLL SIZE	50m
USAGE	Sheer	COLOURFASTNESS TO LIGHT	6
COMPOSITION	100% POLYESTER	FLAMMABILITY	AS/NZS 1530.2 & 1530.3
WIDTH	300cm	ABRASION	N/A

CARE INSTRUCTIONS


Regular care will minimize need for additional cleaning. Gently vacuum with appropriate attachment. Always exercise caution when spot cleaning. Test clean on non-exposed surface. Remove hooks rings & trims before cleaning. Gently vacuum regularly with appropriate attachment. Warm hand wash. Do not bleach. Do not rub or wring. Drip dry in shade. For best results hang curtains by their hooks to damp dry immediately. Use warm iron. Dry cleanable P 50. Possible shrinkage 3%.

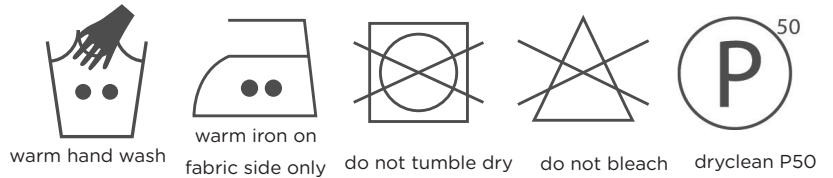


AVAILABLE COLOURS



CHAMPAGNE



IVORY



WHITE

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd – trading as AWTA Product Testing
A.B.N. 43 006 014 106
1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O. Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

CLIENT : FILIGREE TEXTILES PTY LTD
150 VICTORIA STREET
NORTH GEELONG VIC 3215

TEST NUMBER : 7-564843-BV
DATE : 10/03/2009

SAMPLE DESCRIPTION Clients Ref: "Como, Milan II, Crystal II, Turin II"
Woven sheer fabric
Colour: White, Ivory, Champagne, Bone
End Use: Curtain

THESE RESULTS MUST BE CONSIDERED IN CONJUNCTION
WITH THE COMMENTS ON THE FOLLOWING PAGE(S)

Material Specification provided by client:
Nominal Composition: Polyester
Nominal Mass: 55g/m²
Nominal Thickness: 0.1m

AS/NZS 1530.3 - 1999 Simultaneous determination of Ignitability, Flame
Propagation, Heat Release and Smoke Release

RESULTS: Face tested: Both
Date tested: 23.01.2009

	Mean		Standard Error
Ignition time	Nil	min	Nil
Flame propagation time	Nil	s	Nil
Heat release integral	Nil	kJ/m ²	Nil
Smoke release, log d	Nil		Nil
Optical density, d	Nil	/m	

Number of specimens ignited: 0

Number of specimens tested: 6

REGULATORY INDICES: Ignitability Index 0 Range 0-20
Spread of Flame Index 0 Range 0-10
Heat Evolved Index 0 Range 0-10
Smoke Developed Index 0-1 Range 0-10

172879

2

(CONTINUED NEXT PAGE)

PAGE 1

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



This Laboratory is accredited by the National Association of Testing Authorities, Australia, for:
- Chemical Testing of Textiles & Related Products : Accreditation No. 983
- Mechanical Testing of Textiles & Related Products : Accreditation No. 985
- Heat & Temperature Measurement : Accreditation No. 1356

This document is issued in accordance with NATA's accreditation requirements. Samples, and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved in advance by the Managing Director of AWTA Ltd.



0204/11/06

Sandola
APPROVED SIGNATORY

Michael A. Jackson
MICHAEL A. JACKSON B.Sc. (Hons)
MANAGING DIRECTOR

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd – trading as AWTA Product Testing
A.B.N. 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031

P.O. Box 240, North Melbourne, Victoria 3051

Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

CLIENT : FILIGREE TEXTILES PTY LTD
150 VICTORIA STREET
NORTH GEELONG VIC 3215

TEST NUMBER : 7-564843-BV
DATE : 10/03/2009

Comments:

These results only apply to the specimen mounted, as described in this report.

The results of this fire test may be used to directly assess fire hazard, but it should be recognized that a single test method will not provide a full assessment of fire hazard under all fire conditions.

Ignition is initiated by a pilot flame that is held near, but does not touch the specimen. A material that does not ignite during the standard test may ignite if contacted with a pilot flame during the test.

The specimens were mounted to simulate use in an unsupported or free hanging mode. The results may be significantly different when mounted to simulate a wall cladding or upholstery application.

Each test specimen was sandwiched between two layers of galvanised welded square mesh made from wire of nominal diameter 0.8mm and nominal spacing 12mm in both directions and the assembly clamped in four places.

To allow free movement of sample during testing all corners were folded away from the clamps.

Smoke Developed Index is reported as 0-1 due to the inability of the smoke measurement equipment to resolve an index of zero.

172879

(CONTINUED NEXT PAGE)

PAGE 2

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



This Laboratory is accredited by the National Association of Testing Authorities, Australia, for:
- Chemical Testing of Textiles & Related Products : Accreditation No. 983
- Mechanical Testing of Textiles & Related Products : Accreditation No. 985
- Heat & Temperature Measurement : Accreditation No. 1356

This document is issued in accordance with NATA's accreditation requirements. Samples, and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved in advance by the Managing Director of AWTA Ltd.



0204/11/06

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc. (Hons)
MANAGING DIRECTOR

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd – trading as AWTA Product Testing
A.B.N. 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O. Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

CLIENT : FILIGREE TEXTILES PTY LTD
150 VICTORIA STREET
NORTH GEELONG VIC 3215

TEST NUMBER : 7-564843-BV
DATE : 10/03/2009

AS 1530.2-1993
20/02/2009
DATE TESTED:

Test for Flammability of Materials

Flammability Index: 1 Range 0 - 100 for most material

	Length	Width	
Spread Factor: Range 0 - 40	0	0	
Heat Factor: Range 0 - upward	1	1	
Maximum height (d) mean	0.5	0.5	
cv	0.0	0.0	%
Time (t) mean	N/A	N/A	s
cv	N/A	N/A	%
Heat (a) mean	1.5	1.5	degC min
cv	0.0	0.0	%
No of specimens tested	6	6	

These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test, and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use

172879

(END OF REPORT)

PAGE 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



This Laboratory is accredited by the National Association of Testing Authorities, Australia, for:
- Chemical Testing of Textiles & Related Products : Accreditation No. 983
- Mechanical Testing of Textiles & Related Products : Accreditation No. 985
- Heat & Temperature Measurement : Accreditation No. 1356

This document is issued in accordance with NATA's accreditation requirements. Samples, and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved in advance by the Managing Director of AWTA Ltd.



0204/11/06

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR