

Fabric Specifications

THERMOGUARD BLOCKOUT

1 COLOUR	Off White
COATING TYPE	acrylic flock blockout
COMPOSITION	100% Polyester
WIDTHS	150cm & 280cm
CONTINUOUS	150cm - N 280 - Y
BASE WEIGHT	N
PATTERN REPEAT	Nil
WEIGHT	255gsm
ROLL SIZE	150cm 45m 280cm - 27m available as roll stock only
USE	lining
COLOURFASTNESS TO LIGHT	6 using blue scales AS2001.4.21-2006 
COUNTRY OF ORIGIN	NON EU

This fabric meets Australian & New Zealand Textile Standards for: Drapery 2663.1.1997 -- Category: 3 High Performance

TEST RESULTS

TESTED TO AS/NZS 1530.2	Y
FLAMMABILITY INDEX	6
SPREAD FACTOR	L:4 W:5
HEAT FACTOR	L:1 W:1
TESTED TO AS/NZS 1530.3	Y
IGNITABILITY INDEX	0 (range 0-20)
SPREAD OF FLAME INDEX	0 (range 0-10)
HEAT EVOLVED INDEX	0 (range 0-10)
SMOKE DEVELOPED INDEX	4 (range 0-10)
MARTINDALE	n/a


Complies with Building Code of Australia requirements for Class 2 to 9(a) buildings

Care Code 6 -For use on acrylic foam backed fabrics and flock coated fabrics of both man-made fibres and cotton.


Regular care will minimise the need for additional cleaning. Gently vacuum with appropriate attachment. Always exercise caution when spot cleaning. Test clean on non-exposed surface. Avoid excessive rubbing and abrasion. Remove hooks rings and trims before cleaning. Drycleaning: Use specialist curtain drycleaners as recognised by the Soft Furnishings Industry Association of Australia Inc. For perchlorethylene solvent temperature 18 - 20o C, no moisture, gentle cycle, moderate (approx 50% capacity) loading to minimise mechanical action. One Bath Drycleaning Procedure: 3 minutes passing through the filter, reduced mechanical action, 2 minutes drain to tank or still, 2 minutes extract to tank or still. Two Stage Drying Procedure: 25 minutes drying at 55o C, then 6 minutes drying at 35o C. Deodorise 6 minutes or until curtains are cool. For white Spirit or Hydrocarbon, standard Drycleaning practices are appropriate. Hang curtains upon removal from machine. Do not iron/press coated side. Warm iron/press on fabric side only. Washing: Curtains are heavy when wet. Professional we cleaning recommended. DO NOT WASH IN DOMESTIC WASHING MACHINE. Hand wash in cool to warm water (max 40o C) Mild detergents such as wool mixes are recommended. Do not bleach, soak, rub or wring. Drip dry in shade. Do not tumble dry. Hang curtains by their hooks to avoid coated sides touching. Do not use pegs. Do not fold curtains over clothes lines. Do not iron/press coated sides. Warm iron/press on fabric side only. Possible shrinkage 3%



warm hand wash



warm iron



do not tumble dry



do not bleach



dryclean as per
instructions




FIRE RETARDANT
AS/NZS1530.2 & 3

Guarantee: 3 Years in accordance with our fabric type and care instructions


basfordbrands
basfordbrands.com

filigree
COMPLETE LIVING

THERMOGUARD BLOCKOUT FIRE RETARDANT



AVAILABLE IN 1 COLOUR

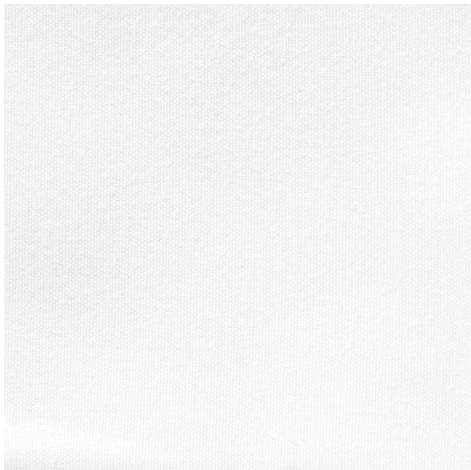

OFF WHITE